

Thermoplastic LED Exit Combo

FEATURES

- LED combo exit where each of the lamp heads contain 12 long lasting, efficient, ultra-bright white LEDs
- Easy to install, snap together design
- Rugged, injection-molded UL94 V-0 flame retardant, high-temperature thermoplastic housing
- Remote capable- up to 2 CLED remote heads
- Universal style – includes 2 face plates, a back plate and mounting canopy
- Charge rate/power "ON" LED indicator light with test button
- Low voltage disconnect eliminates deep discharge
- Brown-out, short circuit and voltage surge protection
- Overcharge protection
- UL recognized maintenance-free NiCad battery
- Universal J-Box mounting system – Ceiling, wall or end mount
- UL listed 90 minute emergency run time, 24 hour recharge time
- Constant, uniform illumination by long-life, high intensity, red or green LEDs
- Fully-illuminated 6" characters with 3/4" stroke
- Optional Self Test/Self Diagnostics (SDT) available
- Chevron-style, universal arrow knockouts
- 120/277V dual primary, 60Hz input
- 1 Watt (8 LEDs x 0.125 Watt) per head
- Standard finishes: Black and white
- Suitable for damp location




Combining LED exit illumination with reliable LED lamp heads, this attractive low-profile design offers maintenance-free, long life dependable service. Easily mounts above doors and in restricted spaces to fit any application.

WARRANTY

Any component that fails due to manufacturers defect is guaranteed for 3 years with a separate 5 year pro-rated warranty on the battery. The warranty does not cover physical damage, abuse or acts of God. Manufacturer reserves the right to charge for such repairs if deemed necessary.

DIMENSIONS

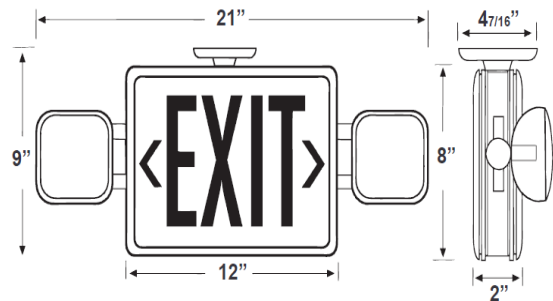

ORDERING INFORMATION

Series	Style	Finish	Type	Options
02-C2RWLED-B	2 = UNIVERSAL	W = WHITE	LED Lamps	SDT = SELF TEST / DIAGNOSTICS
02-C2GWLED-B		B = BLACK		RC = REMOTE CAPABILITY